

# EMX5016CF, EMX5014C

## Powered Mixers



## EMX5016CF

Rear Panel



## EMX5014C

Rear Panel



*Console-style powered mixers that can take your live sound to the next level.*

- 14 inputs on the EMX5014C, up to 8 mics.
- 16 inputs on the EMX5016CF, up to 12 mics.
- Gain controls and 26-dB pad switches for optimum input level matching.
- Advanced one-knob compressor on mono input channels.
- 3-band EQ on all input channels with mid-frequency sweep on mono channels.
- Yamaha FCL system makes locating and eliminating feedback easier than ever. (EMX5014C)
- 16 digital SPX effect programs with adjustable parameters – dual processors on the EMX5016CF.
- EMX5016CF additionally features 9-band digital graphic EQ with presets and memory, advanced automated frequency response correction, automated feedback suppression, and a multi-band “Maximizer”.
- Comprehensive I/O with external AUX and EFFECT sends.
- Power amp mode selector allows two-channel power amplifier to be quickly configured for Main + Main, Mono + Aux 1, or Aux 1 + Aux 2 operation.
- Precise 12-segment stereo level meter.
- Yamaha Speaker Processing.
- Optional rack mount hardware.

### OPTIONS

**RK5014**  
Rack Mount Kit

**FC5**  
Foot Switch



# EMX5016CF, EMX5014C

## GENERAL SPECIFICATIONS

	EMX5016CF	EMX5014C
<b>Maximum output power</b>	500W + 500W (4 ), 370W + 370W (8 / AC100V model) @1kHz, THD+N " 0.5%	350W + 350W (8 / AC120V model) 320W + 320W (8 / AC220-240V model)
<b>Total harmonic distortion</b> (THD+N) @ 20-20kHz	" 0.3%, +14dBu output into 600ohms	
<b>Frequency response</b> GAIN=Minimum, PAD=OFF	0, +0, -3dB, 20Hz-20kHz, 0dB @1kHz	
<b>Equivalent input noise</b> GAIN=Maximum, 20-20kHz	-128dBu	
<b>Crosstalk</b> @ 1kHz	-68dB, adjacent inputs -68dB, input to output	
<b>Phantom voltage</b>	+48V	
<b>Channel equalizer</b> +15, -15dB Maximum	HIGH: 10kHz (Shelving) MID(MONO): 250Hz-5kHz (Peaking) MID(ST) 2.5kHz (Peaking) LOW: 100Hz (Shelving)	
<b>Compressor (COMP)</b>	On each channel; One control adjusts the Gain, threshold and Ratio simultaneously	
<b>Channel peak indicator</b>	LED turns on when post EQ signal reaches -3dB below clipping	
<b>Channel signal indicator</b>	LED turns on when post EQ signal reaches -10dB	
<b>Feedback suppressor</b>	AUTO/MANUAL mode	-
<b>FCL indicator</b>	-	input level: -75dB
<b>LED level meter</b> (ST, PFL/AFL)	2*12 points LED meter (PEAK,+5,+3,+1,0,-1,-3,-5,-7,-10,-15,-20 dB) PEAK lights if the signal comes within 3 dB of the clipping level.	
<b>Frequency response correction system</b>	Pink noise/Music playback measurement mode	-
<b>Maximizer</b>	3-band compressor ON/OFF	-
<b>Digital graphic equalizer</b>	9-band, ±12dB; Preset x3, User preset x3	-
<b>Analog graphic equalizer (ST OUT)</b>	-	9 Band (63,125,250,500,1k,2k,4k,8k,16k Hz), +12/-12 dB Maximum
<b>Digital effect</b>	16 programs, Parameter control Foot switch (FC5:Option) for Effect ON/OFF	
<b>Lamp</b>	XLR-3-31 type, 12V DC between pins 2 and 3, 5W max.	-
<b>Power amplifier protection</b>	POWER switch on/off mute DC-fault Thermal / heatsink temp ≥ 90 degrees celsius VI limiter / RL " 2 Clip limiter / THD ≥1%, Indicator x 2	
<b>Power supply protection</b>	Thermal / heatsink temp ≥ 100 degrees celsius	
<b>Cooling</b>	Variable-speed fan (x 2)	
<b>Power consumption</b>	Japan: AC100V 50/60Hz, 500W North America: AC120V, 60Hz, 500W Other Areas: AC220-240V, 50/60Hz, 500W	
<b>Dimensions (W x H x D)</b>	444 x 155 x 493mm (17.5" x 6.1" x 19.4")	
<b>Weight</b>	11.0kg (24.3lbs)	10.5kg (23.1lbs)

## INPUT CHARACTERISTICS


Input Terminal	Pad	Gain	Actual Load Impedance	For Use With Nominal	Input Level			Connector
					Sensitivity	Nominal	Max. before Clip	
<b>EMX5016CF</b>								
CH INPUT A 1-8	0dB	-60dB	3k	50-600 Mics	-80dBu	-60dBu	-40dBu	XLR-3-31 type*3
		-16dB			-36dBu	-16dBu	+4dBu	
		-34dB			-54dBu	-34dBu	-14dBu	
CH INPUT B 1-8	26dB	+10dB	10k	600 Lines	-10dBu	+10dBu	+30dBu	TRS phone jack
		-60dB			-80dBu	-60dBu	-40dBu	
		-16dB			-36dBu	-16dBu	+4dBu	
ST CH MIC INPUT 9/10-15/16	0dB	-60dB	3k	50-600 Mics	-54dBu	-34dBu	-14dBu	XLR-3-31 type
		-16dB			-10dBu	+10dBu	+30dBu	
		-34dB			-10dBu	+10dBu	+30dBu	
ST CH LINE INPUT 9/10-15/16	26dB	+10dB	10k	600 Lines	-10dBu	+10dBu	+30dBu	Phone jack, RCA pin jack
		-34dB			-10dBu	+10dBu	+30dBu	
		-16dB			-10dBu	+10dBu	+30dBu	
CH INSERT IN (1-8)	-	-	10k	600 Lines	-20dBu	0dBu	+20dBu	Phone jack
<b>EMX5014C</b>								
CH INPUT A 1-6	0dB	-60dB	3k	50-600 Mics	-80dBu	-60dBu	-40dBu	XLR-3-31 type*3
		-16dB			-36dBu	-16dBu	+4dBu	
		-34dB			-54dBu	-34dBu	-14dBu	
CH INPUT B 1-6	26dB	+10dB	10k	600 Lines	-10dBu	+10dBu	+30dBu	TRS phone jack
		-60dB			-80dBu	-60dBu	-40dBu	
		-16dB			-36dBu	-16dBu	+4dBu	
ST CH INPUT 7/8-9/10	0dB	-60dB	3k	50-600 Mics	-54dBu	-34dBu	-14dBu	XLR-3-31 type
		-16dB			-10dBu	+10dBu	+30dBu	
		-34dB			-10dBu	+10dBu	+30dBu	
ST CH INPUT 11/12-13/14	26dB	+10dB	10k	600 Lines	-10dBu	+10dBu	+30dBu	Phone jack, RCA pin jack
		-34dB			-10dBu	+10dBu	+30dBu	
		-16dB			-10dBu	+10dBu	+30dBu	
CH INSERT IN (1-6)	-	-	10k	600 Lines	-20dBu	0dBu	+20dBu	Phone jack

## OUTPUT CHARACTERISTICS

Output Terminal	Actual Source Impedance	For Use With Nominal	Output Level		Connector
			Nominal	Max. before Clip	
<b>EMX5016CF</b>					
ST OUT [L,R]	150	600 Lines	+4dBu	+20dBu	Phone jack (TRS)
ST SUB OUT [L,R]	150	600 Lines	+4dBu	+20dBu	Phone jack (TRS)
AUX SEND 1,2	150	600 Lines	+4dBu	+20dBu	Phone jack (TRS)
EFFECT SEND 1,2	150	600 Lines	+4dBu	+20dBu	Phone jack (TRS)
CH INSERT OUT 1-8	600	10k Lines	0dBu	+20dBu	Phone jack (TRS)
REC OUT [L,R]	600	10k Lines	-10dBV	+10dBV	RCA pin jack
PHONES [L,R]	100	40 Lines	3mW	75mW	ST phone jack
SPEAKERS	0.1	4 Speakers	125W	500W	SPEAKON Phone jack
<b>EMX5014C</b>					
ST OUT [L,R]	150	600 Lines	+4dBu	+20dBu	Phone jack (TRS)
ST SUB OUT [L,R]	150	600 Lines	+4dBu	+20dBu	Phone jack (TRS)
AUX SEND 1,2	150	600 Lines	+4dBu	+20dBu	Phone jack (TRS)
EFFECT SEND	150	600 Lines	+4dBu	+20dBu	Phone jack (TRS)
CH INSERT OUT 1-6	600	10k Lines	0dBu	+20dBu	Phone jack (TRS)
REC OUT [L,R]	600	10k Lines	-10dBV	+10dBV	RCA pin jack
PHONES [L,R]	100	8 / 40 Lines	1mW/3mW	20mW/75mW	ST phone jack
SPEAKER OUT	0.1	4 Speakers	125W	500W	SPEAKON Phone jack


\* 0dBu= 0.775Vrms

## DIMENSIONS

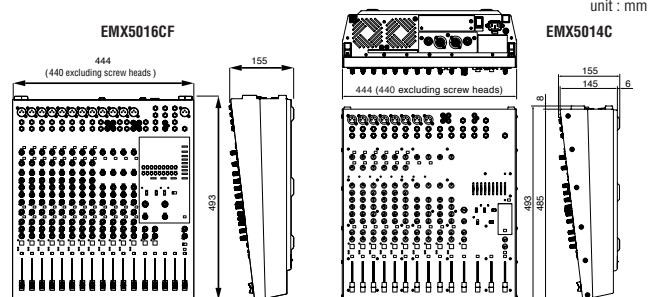

# EMX5016CF, EMX5014C

## BLOCK & LEVEL DIAGRAM (EMX5016CF)

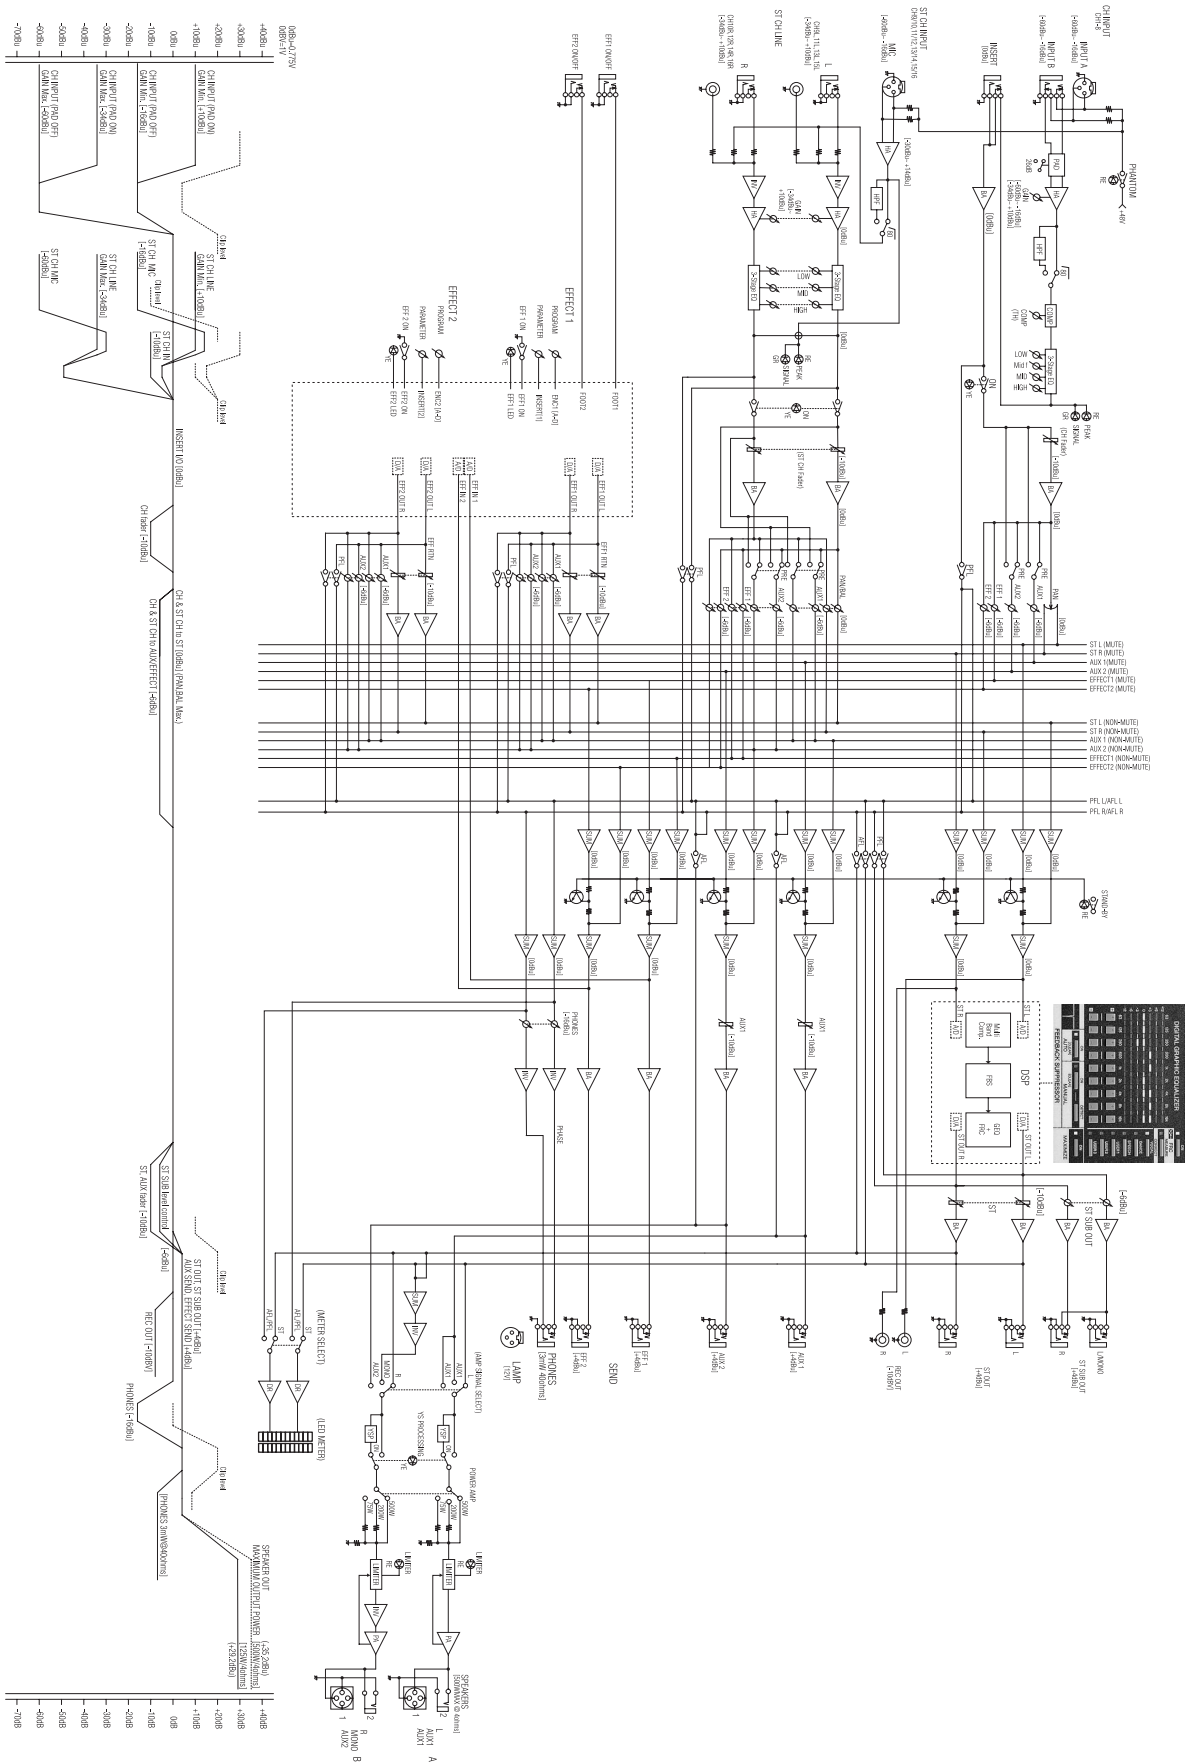

# EMX5016CF, EMX5014C

## BLOCK & LEVEL DIAGRAM (EMX5014C)

