

MG102C, MG124C, MG166C, MG206C

Mixing Consoles



MG102C



MG166C



MG124C



MG206C

A selection of lightweight, portable mixing consoles featuring Yamaha's one-knob compressor for advanced sonic control.

- 10, 12, 16, or 20 inputs in remarkably lightweight, portable designs.
- Yamaha's innovative one-knob compressor lets you easily dial in the amount of compression you need.
- High-quality Neutrik™ balanced XLR connectors on mono microphone/line channels and XLR-equipped stereo channels.
- Top-mounted input and output connectors for easy setup and re-patching.
- High-performance microphone preamplifiers with switchable phantom power.
- 3-band channel EQ and high-pass filters (sweepable midrange on the MG166C, MG206C).
- Smooth 60-millimeter faders & illuminated channel ON switches (MG124C, MG166C, MG206C).
- The MG102C has a single stereo bus (i.e. two mono buses), while all other models feature one or two additional stereo group buses and outputs for convenient channel grouping.
- AUX sends with master send controls for convenient processing and monitoring.
- Return level controls for the AUX and STEREO buses.
- Bright meters for visual level monitoring.
- Optional microphone stand mount available for the MG102C.
- MG166C, MG206C rack mountable.

OPTIONS

BMS10A
Mic Stand Adaptor
for MG102C



MG102C, MG124C, MG166C, MG206C

GENERAL SPECIFICATIONS

	MG206C	MG166C	MG124C	MG102C
Mic/Line inputs	16	10	6	4
Line inputs	12 mono + 4 stereo	8 mono + 4 stereo	4 mono + 4 stereo	2 mono + 4 stereo
Mixer input channels	20	16	12	10
Group buses	4	4	2	-
AUX buses	4	3	2	2
Main buses	Stereo	Stereo	Stereo	Stereo
Total harmonic distortion (THD+N)	≤ 0.1%, 20Hz-20kHz			
Frequency response	0, +1, -3dB, 20Hz-20kHz			
Hum and noise level	Equivalent input noise (EIN): -128dBu Residual output noise: -98dBu			Equivalent input noise (EIN): -128dBu Residual output noise: -100dBu
Crosstalk @1kHz	-70dB			
Power supply adaptor	PA-30 AC adaptor (AC35VCT, 1.4A) 100V, 120V, 220V, 230V or 240V; 50/60Hz	PA-30 AC adaptor (AC35VCT, 1.4A) 100V, 120V, 220V, 230V or 240V; 50/60Hz	PA-20 AC adaptor (AC35VCT, 0.94A) 100V, 120V, 220V, 230V or 240V; 50/60Hz	PA-10 AC adaptor (AC38VCT, 0.62A) 100V, 120V, 220V, 230V or 240V; 50/60Hz
Power consumption	40W	30W	30W	21W
Dimensions (W x H x D)	478 x 102 x 496mm (18.8" x 4.0" x 19.5")	478 x 105 x 496mm (18.8" x 4.1" x 19.5")	346.2 x 86.1 x 436.6mm (13.6" x 3.4" x 17.2")	256.6 x 62.2 x 302.5mm (10.1" x 2.5" x 11.9")
Net weight	6.0kg (13.2lbs)	5.3kg (11.7lbs)	3.0kg (6.6lbs)	1.5kg (3.3lbs)

- Hum and noise are measured with a 6dB/octave filter @12.7kHz; equivalent to a 20kHz filter with infinite dB/octave attenuation.

INPUT SPECIFICATIONS

Terminal	Gain	Actual Load Impedance	For Use With Nominal	Input Level			Connector
				Sensitivity	Nominal	Max. before Clip	
MG102C							
CH IN MIC (1, 2)	-60dB	3kΩ	50-600Ω Mics	-72dBu	-60dBu	-40dBu	XLR-3-31 type*
	-16dB			-28dBu	-16dBu	+4dBu	
CH IN LINE (1, 2)	-34dB	10kΩ	600Ω Lines	-46dBu	-34dBu	-14dBu	Phone jack (TRS)**
	+10dB			-2dBu	+10dBu	+30dBu	
ST CH MIC IN (3/4, 5/6)	-60dB	3kΩ	50-600Ω Mics	-72dBu	-60dBu	-40dBu	XLR-3-31 type*
	-16dB			-28dBu	-16dBu	-6dBu	
ST CH LINE IN (3/4, 5/6)	-34dB	10kΩ	600Ω Lines	-46dBu	-34dBu	-14dBu	Phone jack**
	+10dB			-2dBu	+10dBu	+30dBu	
ST CH IN (7/8, 9/10)	-	10kΩ	600Ω Lines	-22dBu	-10dBu	+10dBu	Phone jack** RCA pin jack**
CH INSERT IN (1, 2)	-	10kΩ	600Ω Lines	-12dBu	0dBu	+20dBu	Phone jack (TRS)**
RETURN [L,R]	-	10kΩ	600Ω Lines	-8dBu	+4dBu	+24dBu	Phone jack**
2TR IN [L,R]	-	10kΩ	600Ω Lines	-22dBV	-10dBV	+10dBV	RCA pin jack**
MG124C							
CH IN MIC (1-4)	-60dB	3kΩ	50-600Ω Mics	-80dBu	-60dBu	-40dBu	XLR-3-31 type*
	-16dB			-36dBu	-16dBu	+4dBu	
CH IN LINE (1-4)	-34dB	10kΩ	600Ω Lines	-54dBu	-34dBu	-14dBu	Phone jack (TRS)**
	+10dB			-10dBu	+10dBu	+30dBu	
ST CH MIC IN (5/6,7/8)	-60dB	3kΩ	50-600Ω Mics	-80dBu	-60dBu	-40dBu	Phone jack (TRS)**
	-16dB			-36dBu	-16dBu	-6dBu	
ST CH LINE IN (5/6,7/8)	-34dB	10kΩ	600Ω Lines	-54dBu	-34dBu	-14dBu	Phone jack**
	+10dB			-10dBu	+10dBu	+30dBu	
ST CH IN (9/10,11/12)	-	10kΩ	600Ω Lines	-30dBu	-10dBu	+10dBu	Phone jack** RCA pin jack**
CH INSERT IN (1-4)	-	10kΩ	600Ω Lines	-20dBu	0dBu	+20dBu	Phone jack (TRS)**
RETURN [L,R]	-	10kΩ	600Ω Lines	-12dBu	+4dBu	+24dBu	Phone jack**
2TR IN [L,R]	-	10kΩ	600Ω Lines	-26dBV	-10dBV	+10dBV	RCA pin jack**
MG166C							
CH IN MIC (1-8)	-60dB	3kΩ	50-600Ω Mics	-80dBu	-60dBu	-40dBu	XLR-3-31 type*
	-16dB			-36dBu	-16dBu	+4dBu	
CH IN LINE (1-8)	-34dB	10kΩ	600Ω Lines	-54dBu	-34dBu	-14dBu	Phone jack (TRS)**
	+10dB			-10dBu	+10dBu	+30dBu	
ST CH MIC IN (9/10, 11/12)	-60dB	3kΩ	50-600Ω Mics	-80dBu	-60dBu	-40dBu	XLR-3-31 type*
	-16dB			-36dBu	-16dBu	-6dBu	
ST CH LINE IN (9/10, 11/12)	-34dB	10kΩ	600Ω Lines	-54dBu	-34dBu	-14dBu	Phone jack**
	+10dB			-10dBu	+10dBu	+30dBu	
ST CH IN (13/14, 15/16)	-	10kΩ	600Ω Lines	-30dBu	-10dBu	+10dBu	Phone jack** RCA pin jack**
CH INSERT IN (1-8)	-	10kΩ	600Ω Lines	-20dBu	0dBu	+20dBu	Phone jack (TRS)**
RETURN [L,R]	-	10kΩ	600Ω Lines	-12dBu	+4dBu	+24dBu	Phone jack**
2TR IN [L,R]	-	10kΩ	600Ω Lines	-26dBV	-10dBV	+10dBV	RCA pin jack**
MG206C							
CH IN MIC (1-12)	-60dB	3kΩ	50-600Ω Mics	-80dBu	-60dBu	-40dBu	XLR-3-31 type*
	-16dB			-36dBu	-16dBu	+4dBu	
CH IN LINE (1-12)	-34dB	10kΩ	600Ω Lines	-54dBu	-34dBu	-14dBu	Phone jack (TRS)**
	+10dB			-10dBu	+10dBu	+30dBu	
ST CH MIC IN (13/14-19/20)	-60dB	3kΩ	50-600Ω Mics	-80dBu	-60dBu	-40dBu	XLR-3-31 type*
	-16dB			-36dBu	-16dBu	-6dBu	
ST CH LINE IN (13/14, 15/16)	-34dB	10kΩ	600Ω Lines	-54dBu	-34dBu	-14dBu	Phone jack**
	+10dB			-10dBu	+10dBu	+30dBu	
ST CH LINE IN (17/18, 19/20)	-34dB	10kΩ	600Ω Lines	-54dBu	-34dBu	-14dBu	Phone jack** RCA pin jack**
	+10dB			-10dBu	+10dBu	+30dBu	
CH INSERT IN (1-12)	-	10kΩ	600Ω Lines	-20dBu	0dBu	+20dBu	Phone jack (TRS)**
RETURN [L,R]	-	10kΩ	50-600Ω Mics	-12dBu	+4dBu	+24dBu	Phone jack**
2TR IN [L,R]	-	10kΩ	600Ω Lines	-26dBV	-10dBV	+10dBV	RCA pin jack**

- Sensitivity is the lowest level that will produce the nominal output level when the unit is set to maximum level.
- 0dBu : 0.775Vrms; -0dBV : 1Vrms.
- * : Balanced; ** : Unbalanced


OUTPUT SPECIFICATIONS

Terminal	Actual Source Impedance	For Use With Nominal	Output Level		Connector
			Nominal	Max. before Clip	
MG102C					
STEREO OUT [L,R]	150Ω	10kΩ Lines	+4dBu	+20dBu	Phone jack (TRS)***
AUX SEND	150Ω	10kΩ Lines	+4dBu	+20dBu	Phone jack (TRS)***
CH INSERT OUT (1-2)	75Ω	10kΩ Lines	0dBu	+20dBu	Phone jack (TRS)**
REC OUT [L, R]	600Ω	10kΩ Lines	-10dBV	+10dBV	RCA pin jack**
MONITOR OUT [L, R]	150Ω	10kΩ Lines	+4dBu	+20dBu	Phone jack**
PHONES OUT	100Ω	40kΩ Lines	3mW	75mW	Stereo phone jack**
MG124C					
STEREO OUT [L, R]	75Ω	600Ω Lines	+4dBu	+24dBu	XLR 3-32 type* Phone jack (TRS)**
GROUP OUT [1, 2]	150Ω	10kΩ Lines	+4dBu	+20dBu	Phone jack (TRS)***
AUX SEND (1, 2)	150Ω	10kΩ Lines	+4dBu	+20dBu	Phone jack (TRS)***
CH INSERT OUT (1-4)	75Ω	10kΩ Lines	0dBu	+20dBu	Phone jack**
REC OUT [L, R]	600Ω	10kΩ Lines	-10dBV	+10dBV	RCA pin jack**
MONITOR OUT [L, R]	150Ω	10kΩ Lines	+4dBu	+20dBu	Phone jack (TRS)***
PHONES OUT	100Ω	40kΩ Lines	3mW	75mW	Stereo phone jack**
MG166C					
STEREO OUT [L,R]	75Ω	600Ω Lines	+4dBu	+24dBu	XLR 3-32 type* Phone jack (TRS)**
GROUP OUT [1-4]	150Ω	10kΩ Lines	+4dBu	+20dBu	Phone jack (TRS)***
AUX SEND (1-3)	150Ω	10kΩ Lines	+4dBu	+20dBu	Phone jack (TRS)***
CH INSERT OUT (1-8)	75Ω	10kΩ Lines	0dBu	+20dBu	Phone jack (TRS)**
REC OUT [L, R]	600Ω	10kΩ Lines	-10dBV	+10dBV	RCA pin jack**
MONITOR OUT [L, R]	150Ω	10kΩ Lines	+4dBu	+20dBu	Phone jack (TRS)**
PHONES OUT	100Ω	40kΩ Lines	3mW	75mW	Stereo phone jack**
MG206C					
STEREO OUT [L,R]	75Ω	600Ω Lines	+4dBu	+24dBu	XLR 3-32 type* Phone jack**
GROUP OUT [1-4]	150Ω	10kΩ Lines	+4dBu	+20dBu	Phone jack (TRS)***
AUX SEND (1-4)	150Ω	10kΩ Lines	+4dBu	+20dBu	Phone jack (TRS)***
CH INSERT OUT (1-12)	75Ω	10kΩ Lines	0dBu	+20dBu	Phone jack (TRS)**
REC OUT [L, R]	600Ω	10kΩ Lines	-10dBV	+10dBV	RCA pin jack**
MONITOR OUT [L, R]	150Ω	10kΩ Lines	+4dBu	+20dBu	Phone jack (TRS)***
PHONES OUT	100Ω	40kΩ Lines	3mW	75mW	Stereo phone jack**

- 0dBu : 0.775Vrms; -0dBV : 1Vrms.

- * : Balanced; ** : Unbalanced; *** : Impedance balanced

DIMENSIONS

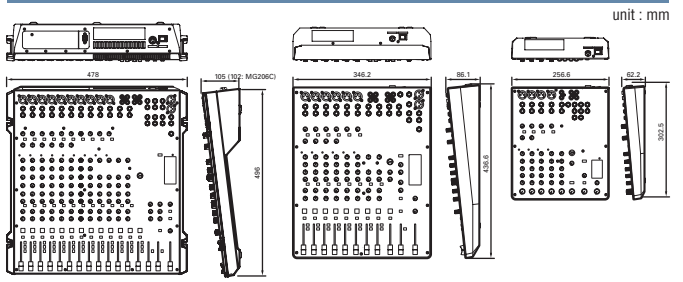

MG166C, MG166CX, MG206C, MG166C-USB, MG166CX-USB, MG206C-USB

MG124C, MG124CX

MG102C, MG82CX